



TECHNICAL SPECIFICATION OF CHAIN SPROCKET COUPLINGS

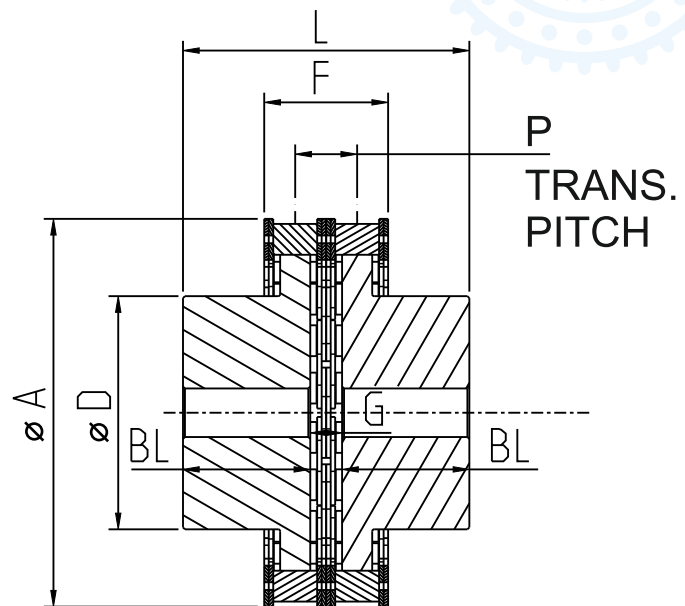

SECTION A-A

Product Code	Teeth Pitch In Inch	No of Teeth	Chain Use	Min Bore	Max Bore	A	D	F	L	BL	G	P
CSC 1/2P"-16T	1/2	16	08B	14	25	77	50	31	97.4	45.5	6.42	13.92
CSC 1/2P"-18T	1/2	18	08B	14	30	85	58	31	97.4	45.5	6.42	13.92
CSC 1/2P"-20T	1/2	20	08B	14	35	93	65	31	97.4	45.5	6.42	13.92
CSC 1/2P"-22T	1/2	22	08B	14	40	101	75	31	97.4	45.5	6.42	13.92
CSC 5/8P"-16T	5/8	16	10B	16	35	96	63	36.2	102.0	47.4	7.19	16.59
CSC 5/8P"-18T	5/8	18	10B	16	40	106	73	36.2	102.0	47.4	7.19	16.59
CSC 5/8P"-20T	5/8	20	10B	16	45	116	84	36.2	102.0	47.4	7.19	16.59
CSC 5/8P"-22T	5/8	22	10B	16	50	127	94	36.2	102.0	47.4	7.19	16.59
CSC 3/4P"-16T	3/4	16	12B	19	40	114	75	42.2	130.9	61.4	8.06	19.46
CSC 3/4P"-18T	3/4	18	12B	19	45	126	85	42.2	130.9	61.4	8.06	19.46
CSC 3/4P"-20T	3/4	20	12B	19	50	138	95	42.2	130.9	61.4	8.06	19.46
CSC 3/4P"-22T	3/4	22	12B	19	55	150	105	42.2	130.9	61.4	8.06	19.46
CSC 1P"-16T	1	16	16B	25	45	151	90	68	147.4	65.5	16.38	31.88
CSC 1P"-18T	1	18	16B	25	50	168	100	68	147.4	65.5	16.38	31.88
CSC 1P"-20T	1	20	16B	25	55	184	110	68	147.4	65.5	16.38	31.88
CSC 1P"-22T	1	22	16B	25	60	200	120	68	147.4	65.5	16.38	31.88

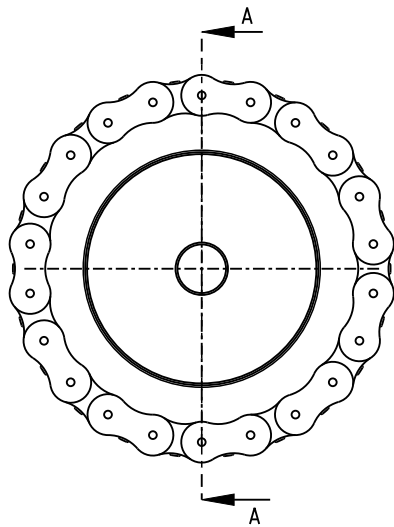